


Technical Data Sheet

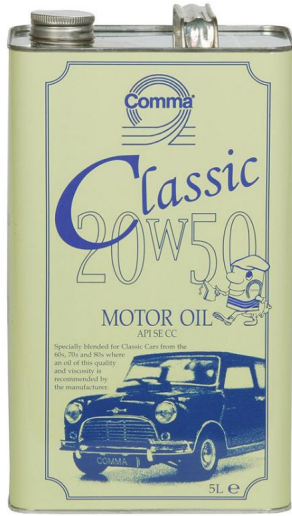

Typical Inspection Data:

Density @ 20°C	0.87 g/cm ³
Viscosity @ 100°C (cSt)	17.2 cSt
Viscosity @ 40°C	145
Viscosity Index	120
Viscosity CCS @ -15°C	8000 cP
Sulphated Ash Mass (%)	1.1 %
Zinc (%)	0.08 %
Colour	Green
Phosphorus (%)	0.07 %
Pour Point (°C)	-27 °C
Calcium (%)	0.22 %

Classic Motor Oil 20W-50 Mineral

Recommended by Comma for applications requiring any of the following:

API SE/CC, SAE 20W-50

Product Features:

- Specially blended for Classic Cars from the 60's, 70's and 80's where an oil of this quality and viscosity is recommended by the manufacturer.
- Ideal for use in classic-stroke petrol cars, non turbo charged.
- Protects and preserves classic engines.
- Ensures economical consumption.

Handling:

- Avoid extremes of temperature.
- Product in cardboard cartons must be stored under cover and away from damp conditions

Shelf life:

- 5 years from date of manufacture
- Manufacture date can be identified from an eight digit code printed on the bottle. YYYY.MM.DD

UPDATED: 06.05.2025