


Technical Data Sheet

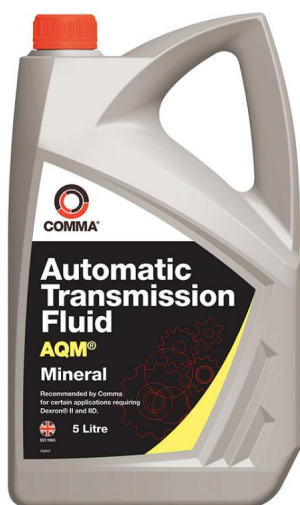

Typical Inspection Data:

| | |
|-------------------------|-------------|
| Density @ 20°C | 0.845 g/cm3 |
| Viscosity @ 100°C (cSt) | 7.5 cSt |
| Viscosity @ 40°C | 36 |
| Colour | Red |
| Phosphorus (%) | 0.01 % |
| Pour Point (°C) | -45 °C |

AQM Mineral

Recommended by Comma for applications requiring any of the following:

Recommended by Comma for certain applications requiring Dexron® II and IID. Suitable for use where the following specifications are called for: Dexron® B, Dexron® II, Dexron® IID, MB 236.2, MB 236.6, Type A Suffix A

Product Features:

- Suitable for many automatic transmissions, torque converters and power steering systems.
- To ensure correct oil selection check Comma's latest Application guide in store or online at CommaOil.com

Handling:

- Avoid extremes of temperature.
- Product in cardboard cartons must be stored under cover and away from damp conditions
- Barrels should be stored under cover if possible
- If barrels must be stored outside then lay them on their side to prevent water collecting around the bungs

Shelf life:

- 5 years from date of manufacture
- Manufacture date can be identified from an eight digit code printed on the bottle. YYYY.MM.DD

UPDATED: 12.08.2025