


Technical Data Sheet

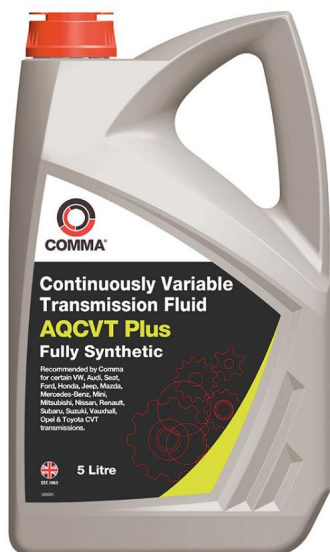

Typical Inspection Data:

Density @ 20°C	0.845 g/cm3
Viscosity @ 100°C (cSt)	7.5 cSt
Viscosity @ 40°C	36
Colour	Brown
Phosphorus (%)	0.04 %
Pour Point (°C)	-45 °C
Calcium (%)	0.02 %

AQCVT Plus Fully Synthetic

Recommended by Comma for applications requiring any of the following:

Recommended by Comma for certain VW, Audi, Seat, Ford, Honda Jeep, Mazda, Mercedes-Benz, Mini, Mitsubishi, Nissan, Renault, Subaru, Suzuki, Vauxhall, Opel & Toyota CVT transmissions. Suitable for use where the following specifications are called for:, Audi/VW VW G 052 180 A2/ TL 521 80, BMW/Mini Cooper CVT Fluid, Daihatsu Ammix CVT Fluid DFC, Daihatsu Ammix CVT Fluid DC, Daihatsu Ammix CVT Fluid DFE, Daihatsu Fluid TC, DiaQueen CVTF J1, DiaQueen CVTF J4, DiaQueen CVTF J4+, Dodge/Jeep, EZL-799 (ZF CVT V1), Ford M2C928-A, GM 1940713, GM 1940714, GM DEX-CVT, Honda HCF-2, Hyundai/Kia CVT-J1, Hyundai/Kia SP III (CVT model), Idemitsu CVTS-EX1, Mazda JWS 3320, MB 236.20, Mercon C, MG Rover ATF EM-CVT, Mopar CVTF +4, Nissan NS-1 CVT fluid, Nissan NS-2 CVT fluid, Nissan NS-3 CVT fluid, Renault Elfmatic CVT, Subaru iCVT, Subaru Lineartronic Chain CVT fluid, Subaru Lineartronic Chain CVTF II Torque CVT Fluid, Subaru Lineartronic CV-30, Subaru Lineartronic High, Subaru NS-2, Suzuki CVT Green 1, Suzuki CVT Green 2, Suzuki CVTF TC, Suzuki CVTF 3320, Toyota CVT FE, Toyota CVT TC, Toyota CVT WS (Prius eCVT only), VW G 052 516 / TL 521 16, WSS-M2C933-A

Product Features:

- High performance CVT fluid for use in a wide range of vehicle makes, including Audi, Toyota, Ford, Mitsubishi, Mercedes Benz, Nissan and many more.
- Provides excellent metal and clutch friction performance.
- Not suitable for Nissan, Toyota and Ford hybrid transmissions.
- To ensure correct oil selection check Comma's latest Application guide in store or online at CommaOil.com

Handling:

- Avoid extremes of temperature.
- Product in cardboard cartons must be stored under cover and away from damp conditions
- Barrels should be stored under cover if possible
- If barrels must be stored outside then lay them on their side to prevent water collecting around the bungs

Shelf life:

- 5 years from date of manufacture

UPDATED: 13.09.2024

- Manufacture date can be identified from an eight digit code printed on the bottle. YYYY.MM.DD