


# **Technical** Data Sheet

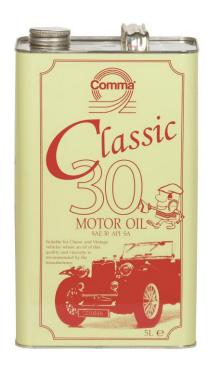

# **Typical Inspection Data:**

Density @ 20 °C	0.865 g/cm <sup>3</sup>
Viscosity @ 100 °C	12.1 cSt
Flash Point	250 °C
Pour Point	-21 °C

# Classic 30

Mineral

Recommended by Comma for applications requiring:

SAE 30 API SA

#### **Product Features:**

- A monograde mineral oil with no detergent additive pack for 4 stroke petrol engines. For use where an oil of this quality is recommended.
- Particularly designed for classic and vintage cars but also suitable for other applications requiring a "straight" or additive free SAE 30 motor oil.
- Helps get the car started in winter.
- Stabilises oil pressure at high temperatures.
- May be used in manually operated gearboxes of that period.

# Handling:

- Avoid extremes of temperature.
- Product in cardboard cartons must be stored under cover and away from damp conditions.

# Shelf Life:

- 5 years from date of manufacture.
- Manufacture date can be identified from a five figure code printed on the bottle. The first three figures indicate the consecutive day of the year, the last two figures the year.